



## DAKA 832FB

### Standard features

- 10.25 cu. ft. firebox
- 33" log capacity
- Full length ash pan
- Dayton 1,200-cfm multi-spaced blower (1)
- Cold air filter box
- Maximum output 200,000 BTU/hr
- 5 year firebox warranty
- Forced draft control

### Benefits

- Provides up to 10 hours burn time
- Heats 3,000 to 4,000 sq. ft.
- Designed to heat the whole house



### ADD-ON/CENTRAL WOOD FURNACE

With a maximum output of 200,000 BTU, this extra-large unit will heat 3,000 to 4,000 sq ft. A forced draft blower is automatically controlled by a wall-mounted room thermostat (included) located in the central living area of the house. This ensures quick heat recovery, good draft, along with consistent, even heat control. A large volume multiple speed 1200-1600 CFM blower, housed in a sheet metal filter box, pushes the heated air out through two 10" raised outlets on top of the unit.

### ACCESSORIES

#### BAROMETRIC DRAFT REGULATOR 6"



- Installs in chimney connector to help provide constant draft control, extend burn times, save fuel, avoid over-firing, and reduce creosote formation.

EXTRA LARGE



# 832FB WOOD STOVE

EXTRA LARGE


Firebox	10.25 cu. ft.
Log length	33"
BTU/hr (output)	Up to 200,000
Heating area	3,000 to 4,000 sq. ft.
Burn time	Up to 10 hours
Emissions	EPA Exempt
Ash pan	Included - full length scoop style
Flue pipe diameter	6"
Heavy-gauge plate steel firebox	7 gauge front, 10 gauge side & back plates
Baffle	3/16" / 7 gauge plate
Size W x H x D	24" x 46" x 58" with filter box
Stove weight / shipping weight	585 lb / 635 lb
Mobile home approved	No
Fresh air intake kit	N/A
Made in	USA
Approvals <sup>†</sup>	USA <sup>‡</sup>
Safety tested to:	UL Standard 391-2010




**WARRANTY** (REFER TO MANUAL OR ONLINE AT [www.dakacorp.com](http://www.dakacorp.com) FOR DETAILS)

DESCRIPTION	PARTS	LABOR
Combustion chamber warranty* - material and workmanship	5 YEARS	5 YEARS
Cast iron components Cast iron grate, cast iron firedoor	1 YEAR	1 YEAR
Standard electrical components	1 YEAR	1 YEAR
Gaskets, draft controls	1 YEAR	1 YEAR
Firebrick	N/A	N/A


FRONT VIEW DIMENSIONS

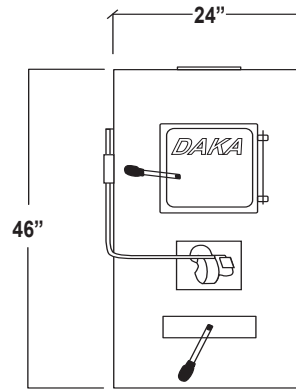


TOP VIEW

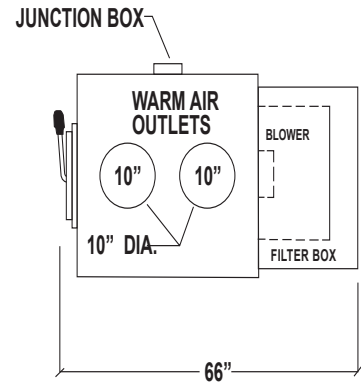

SIDE VIEW DIMENSIONS

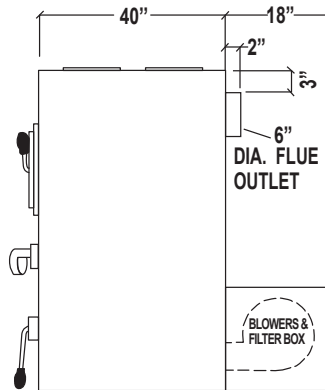

CLEARANCES TO COMBUSTIBLES  
FLOOR PROTECTION

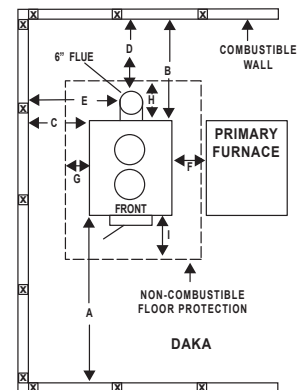

**CLEARANCES TO COMBUSTIBLES**

**SINGLE WALL PIPE**

A	B	C
48"	28"	12"
D	E	F
18"	21"	9"

**FLOOR PROTECTION\***

G	8"
H	11½"
I	16"

\*Steel with a minimum thickness of 0.015" (0.38 mm) or ceramic tiles sealed together with grout. No protection is required if the unit is installed on a non-combustible floor (ex: concrete).

\*\* Floor protection required under the horizontal section (H<sub>0</sub>) of pipe connector. Must exceed each side of pipe by at least 2 inches (51 mm).

<sup>†</sup>Always check with and follow local codes. <sup>‡</sup>See written warranty available online @Dakacorp. for details